




J-SN180F J-SP180F

Type of Appliance	<ul style="list-style-type: none"> • Temperature controlled, continuous flow, gas hot water system • Certified for installation in manufactured (mobile) homes • Forced combustion / Direct vent • Energy Star qualified
Model Number	J-SN180F Natural Gas J-SP180F Propane
Minimum/Maximum Gas Rate (Input)	9,900 - 180,000 BTU/h (Natural Gas) 10,300 - 180,000 BTU/h (Propane)
Electrical	Appliance: AC 120 Volts - 60 Hz Controller: DC 12 Volts
Electrical Consumption	Normal: 76 w Standby: 2 w Anti-frost protection: 184 w
Ignition System	Direct electronic ignition
Hot Water Capacity	Minimum flow rate: 0.26 GPM Minimum activation flow rate: 0.4 GPM Maximum flow rate: 7.5 GPM
Temperature	98° - 120° F (factory default) Maximum temperature is selectable at 120° F or at 140° F
Temperature (without remote)	120° F (factory default) or 140° F
Installation	Indoor only
Energy Factor	Natural Gas: 0.82 Propane: 0.82
Service Connections	Gas supply: 3/4 inch MNPT Cold water inlet: 3/4 inch MNPT Hot water outlet: 3/4 inch MNPT
Water Flow Control	Water flow sensor, electronic water control device and fixed by-pass
Minimum/Maximum Water Supply Pressure	20 - 150 PSI (recommended 30-80 PSI for maximum performance)

FLOW TABLE

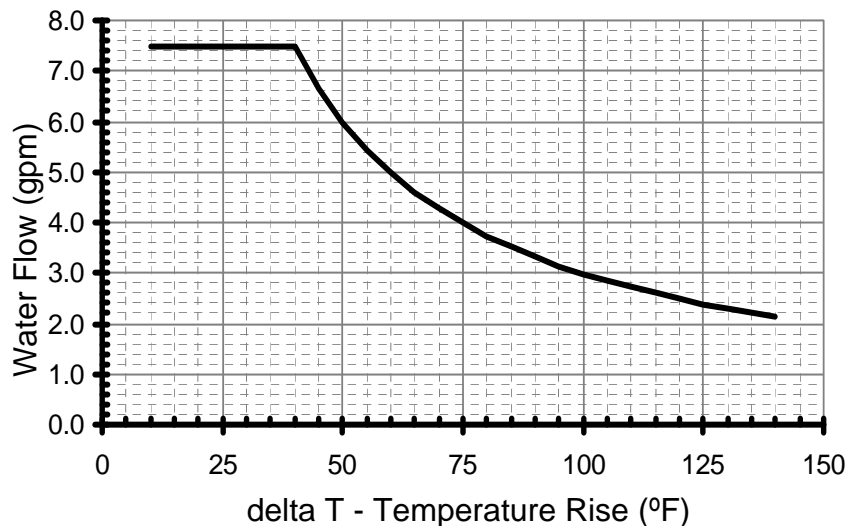



J-SN180F J-SP180F

Water Temperature Control Controller

Controller Cable Safety Devices

Clearances from Combustibles (suitable for closet, attic, and crawl space installations)

Clearances from Non-combustibles

Min. / Max. Gas Supply Pressure (sea level)

Manifold Gas Pressure (inches W.C.)

NOx

Warranty

Simulation feed forward and feedback

J-C100 (included)

Auto Bath Fill Controller: J-C200 (optional)

Non-polarized two-core cable, minimum 22 AWG

- | | |
|--|---|
| <ul style="list-style-type: none"> • Flame failure - Flame Rod • Boiling protection • Combustion fan rpm check • Over current - glass fuse | <ul style="list-style-type: none"> • Remaining flame (OHS) • Thermal fuse • Automatic frost protection |
| <ul style="list-style-type: none"> • Top of heater - 6 inches • Front of heater - 6 inches • Sides of heater - 2 inches | <ul style="list-style-type: none"> • Back of heater - 0 inches • Ground / bottom - 12 inches • From vent pipe - 0 inches |
| <ul style="list-style-type: none"> • Top of heater - 2 inches • Front of heater - 6 inches • Sides of heater - 1/2 inch | <ul style="list-style-type: none"> • Back of heater - 0 inches • Ground / bottom - 12 inches • From vent pipe - 0 inches |

Natural Gas: min 5" W.C. max 10.5" W.C.
Propane Gas: min 8" W.C. max 13.5" W.C.

Natural Gas: high fire 2.9" W.C. low fire 0.55" W.C.
Propane Gas: high fire 4.5" W.C. low fire 0.96" W.C.

Meets California and Texas NOx Emission Rules (40 ng/J; 55 ppm)

Heat exchanger: 12 years* for residential and 5 years* for commercial applications; all other parts 5 years*; labor 1 year; (* 3 years if used as a circulating water heater within a circulation loop, when the water heater is in series with a circulation system and all circulating water flows through the water heater)
Refer to the manual for the complete warranty.

Rinnai is continually updating and improving products; therefore, specifications are subject to change without prior notice. Local, state, provincial and federal codes must be adhered to prior to installation.

DIMENSIONS

WEIGHT: 51 LBS (23 KG)

The wall bracket is adjustable to allow an additional 1.57 inches (40 mm).

DIM	DESCRIPTION	in (mm)
A	Width	14 (355.6)
B	Depth *	9.6 (244.5)
C	Height - Unit	22.9 (582)
D	Distance between mounting holes	25.5 (648.2)
E	Hot Water Outlet - from wall *	3.6 (91)
F	Hot Water Outlet - from center	4.3 (110)
G	Cold Water Inlet - from wall *	2.8 (70)
H	Cold Water Inlet - from center	1.1 (27)
I	Gas Connection - from wall *	3.9 (99)
J	Gas Connection - from center	3.5 (89)
K	From base to gas connection	1.6 (40)
	From base to cold connection	2.0 (50)
	From base to hot connection	1.6 (41)